


1. USB driver Install Process – Windows Vista

1.1. Install new Ubiquam USB driver.

※ If you had installed a previous version of ubiquam driver, please uninstall it first before you install a new version.

1.2. Execute the "Ubiquam USB Driver" and click "Install" button.

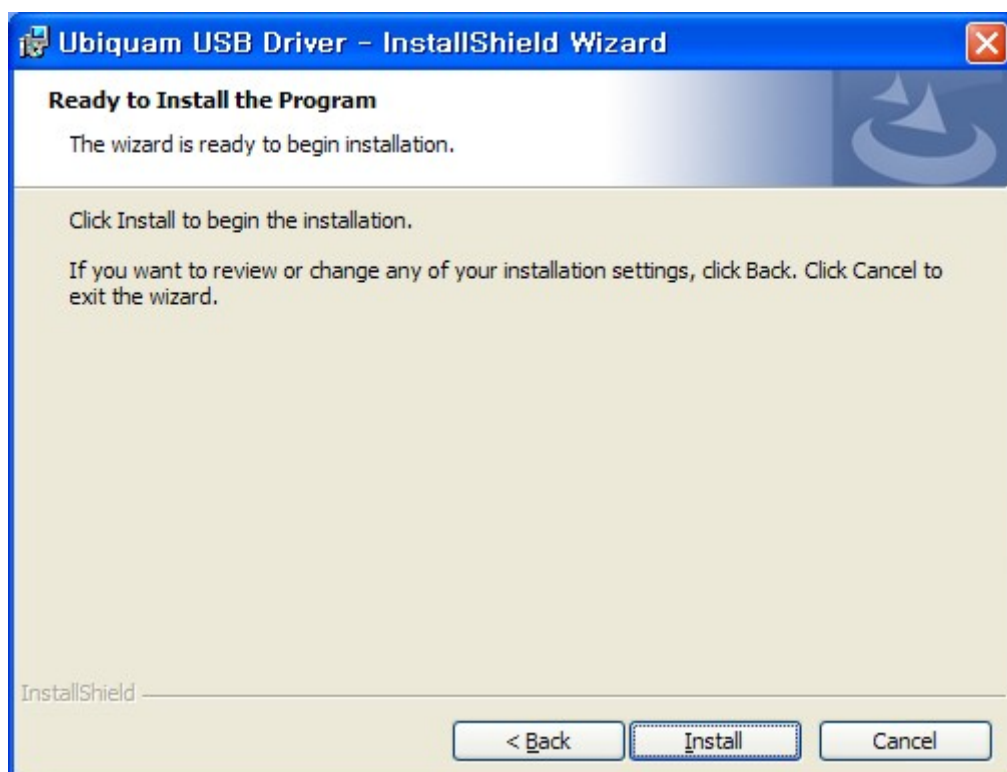


1.3. Please wait until installation is complete.



1.4. After rebooting your computer, please connect your phone with data cable.

You can see the " Found New hardware " message in Windows Taskbar that it has found three types of different drivers in a low ; Ubiquam CDMA2000 Composite Device, Ubiquam CDMA2000 and Ubiquam Diagnostic port.

1.5 To check if the installation has been successfully completed, you may access **Start, Control Panel, System, Hardware, Device Manager**, and check if the following components are displayed:

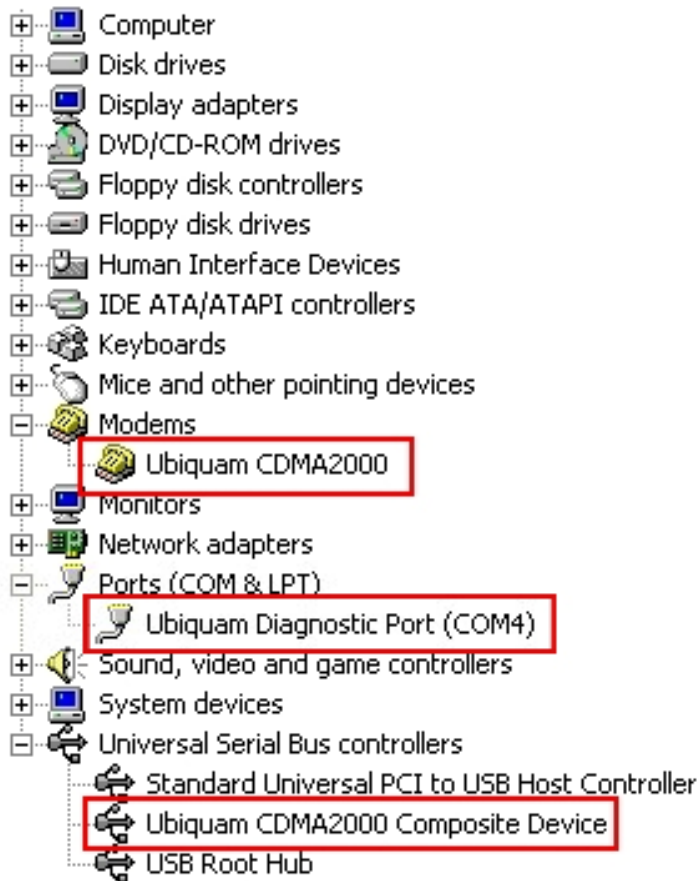


1. **Ubiquam CDMA2000**
2. **Ubiquam Diagnostic Port**
3. **Ubiquam CDMA2000 Composite Device**

2. Access to Internet (Data Service)

2.1 Connect Ubiquam CDMA phone to computer with USB cable.


2.2. "Start" Network and Internet Network and Sharing Center

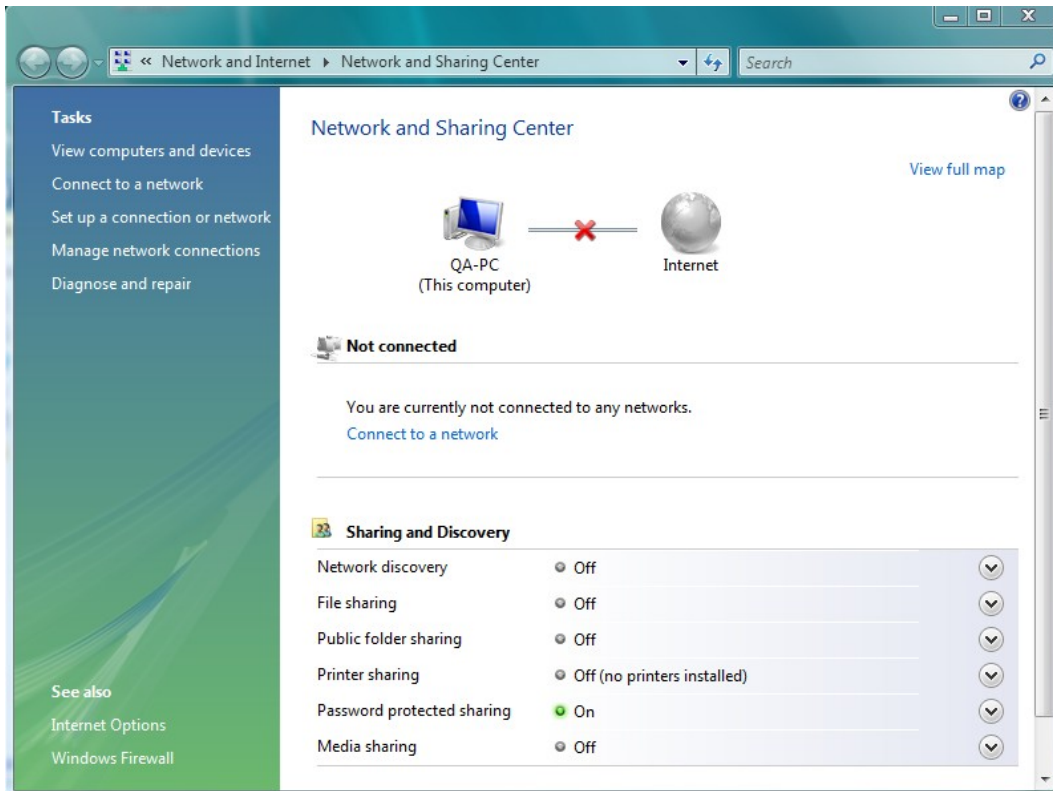


2.3. Click "Next"

Set up a connection or network

2.4. Click "Connect to the Internet"->Next Click

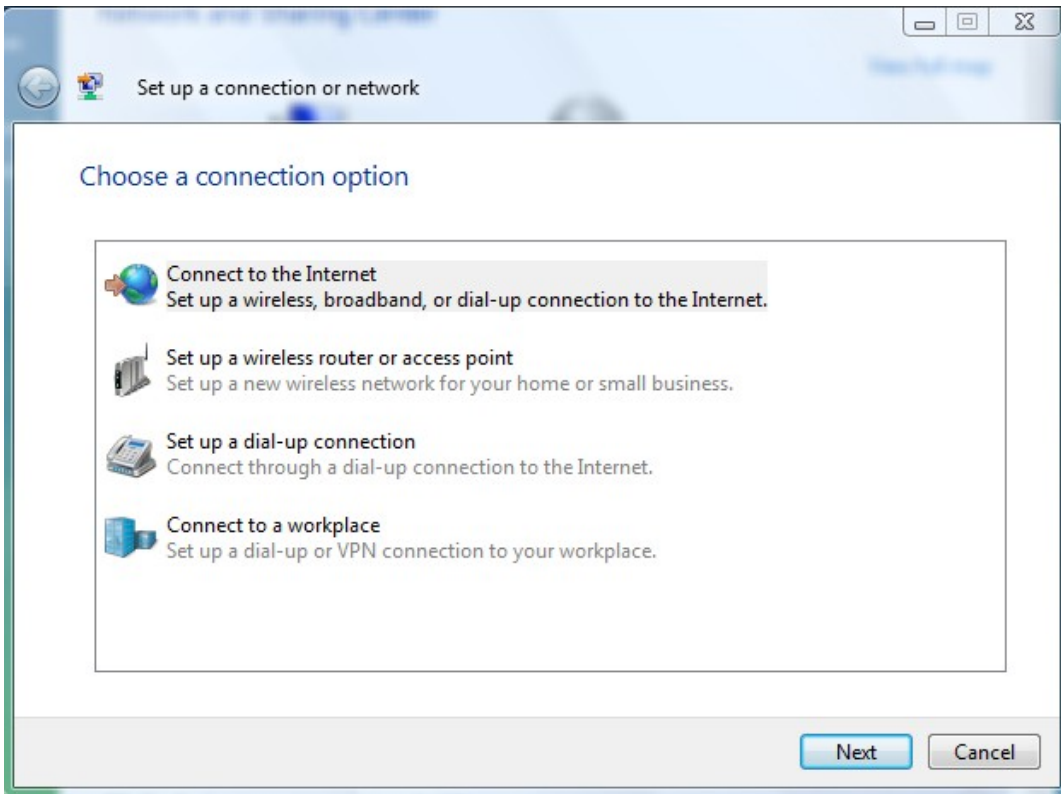


2.5. Click "Dial-up"

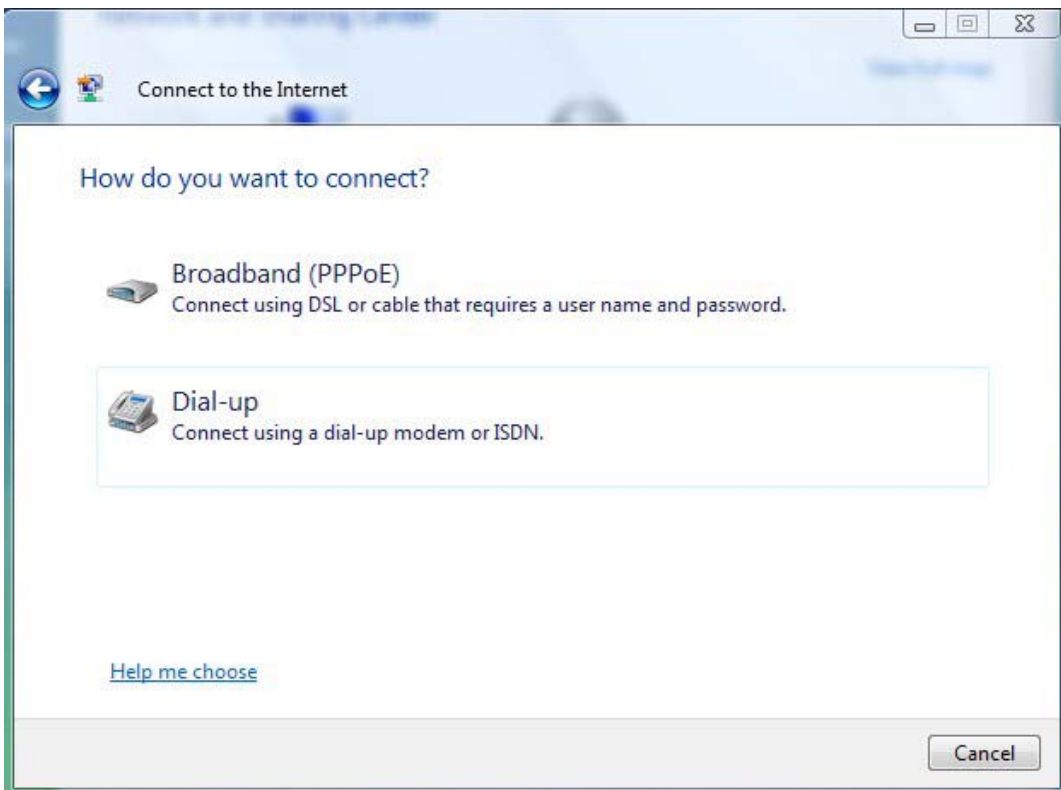


2.6. Click "Connect using a dial-up modem"


Select modem of Ubiquam CDMA 2000, if the PC has more than two modems.

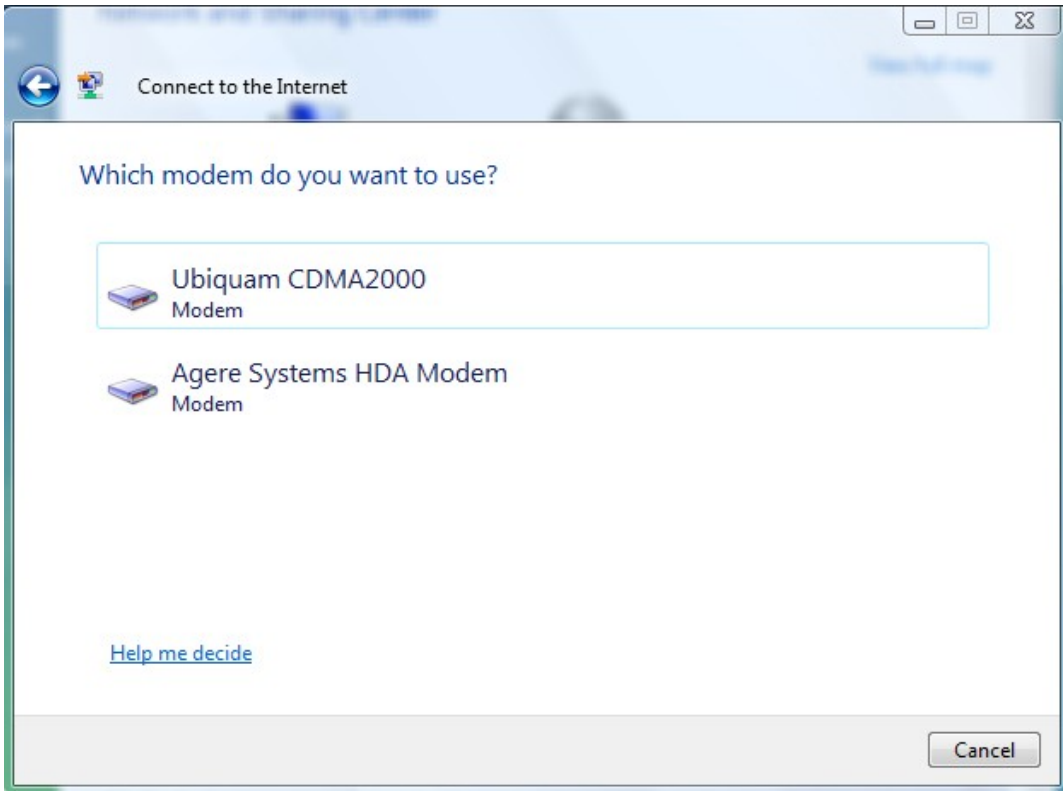

2.7. Click "Next"

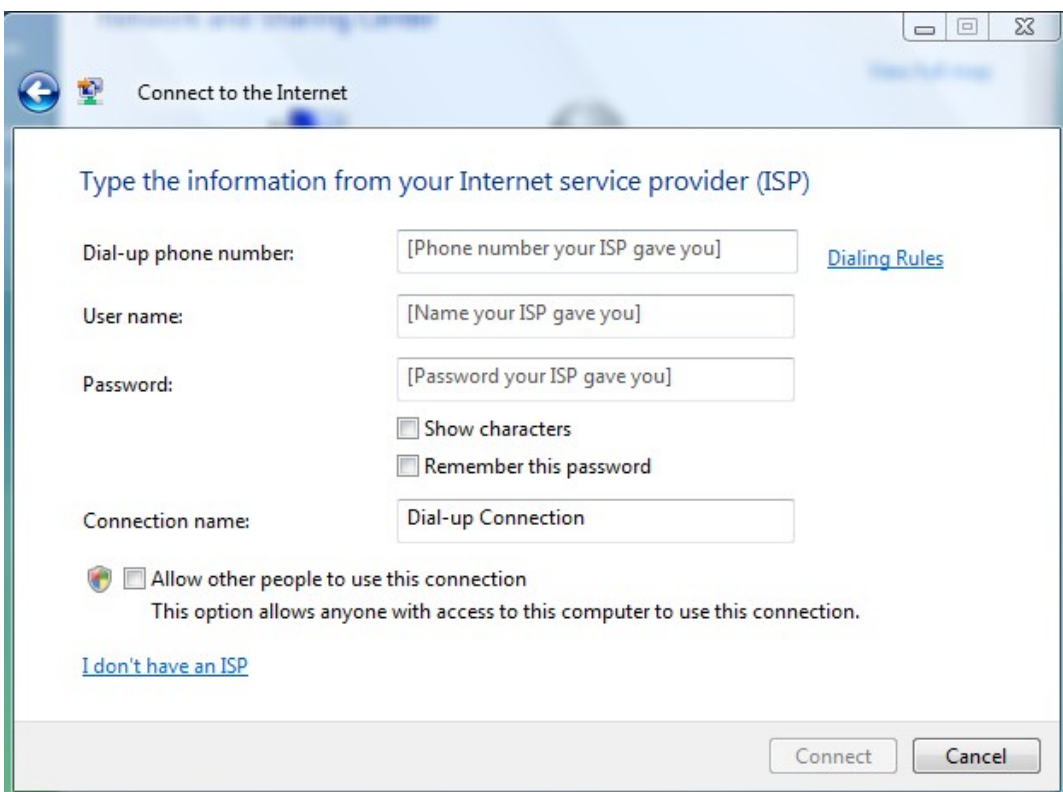


2.9. Put in "#777" in "Phone number" then click "Next"

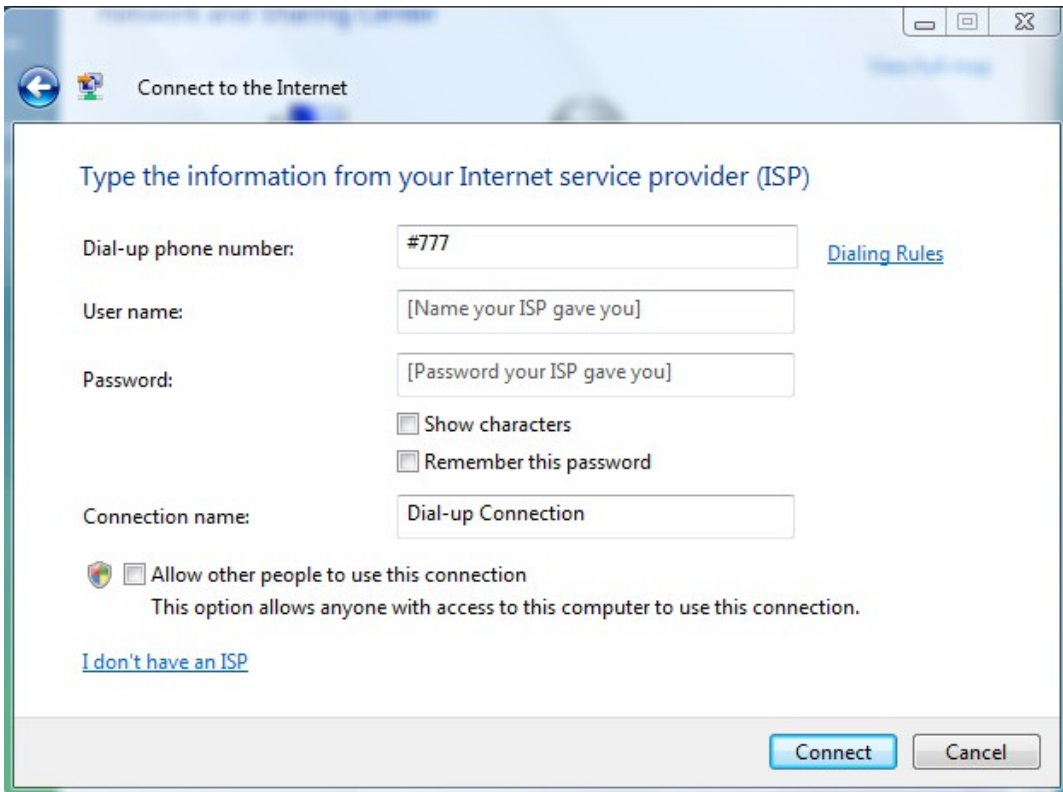

"User name", "Password", and "Dial" and then Click "Dial"

(You can ask your service provider about "User name", "Password", and "Dial")

2.10. Click "Connect" and then Skip button Click

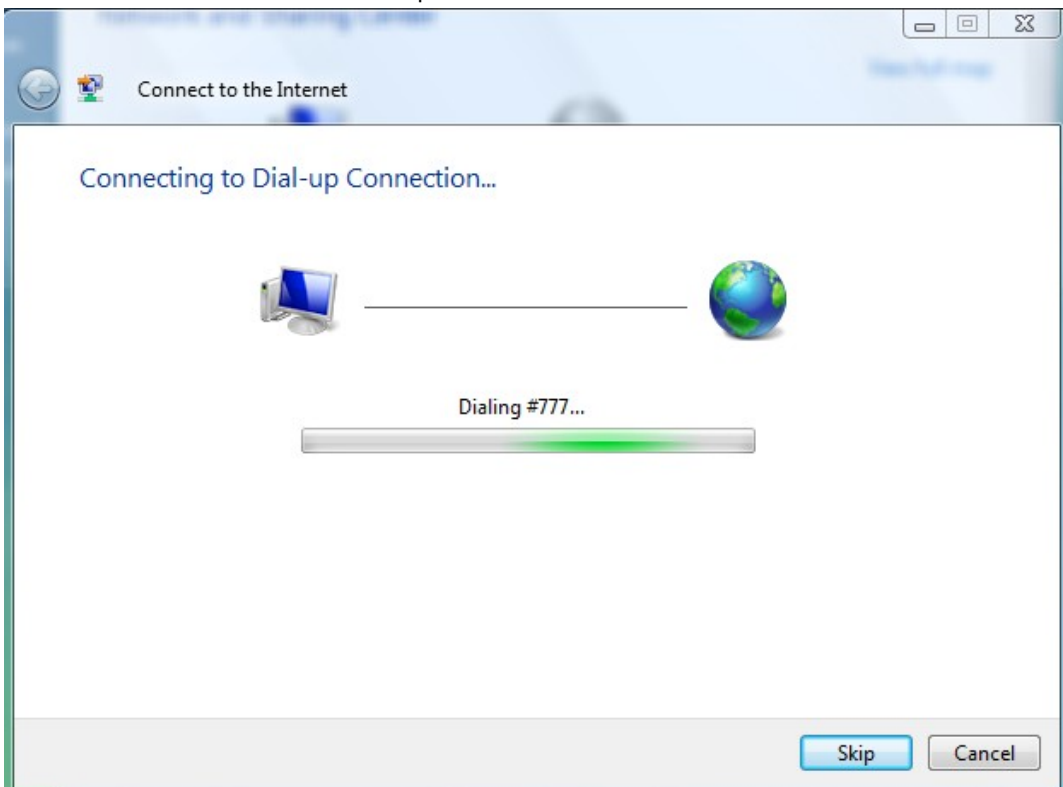

2.12. Input "User name", "Password", and "Dial" and then Click "Dial"
(You can ask your service provider about "User name", "Password", and "Dial")

